ZEHNDERSOMMER.COM

PNEUMATIC GRIPPER FEEDS J380

Strip cross section 80 mm^2



- Clamping force 580 N at 6 Bar
- Traction force 275 N at 6 Bar


SCOPE OF DELIVERY AND OPTIONS

- Feed device complete with cover
- Pneumatic Control with solenoid valve and connecting hoses
- Pilot release
- Mounting bracket
- Clamping elements made of polished steel
- Clamping element cannulated or Nylon
- Clamping element according client specifications

ZEHNDER SOMMER | SWISS PRECISION FEEDING

PNEUMATIC GRIPPER FEEDS J380

PERFORMACE

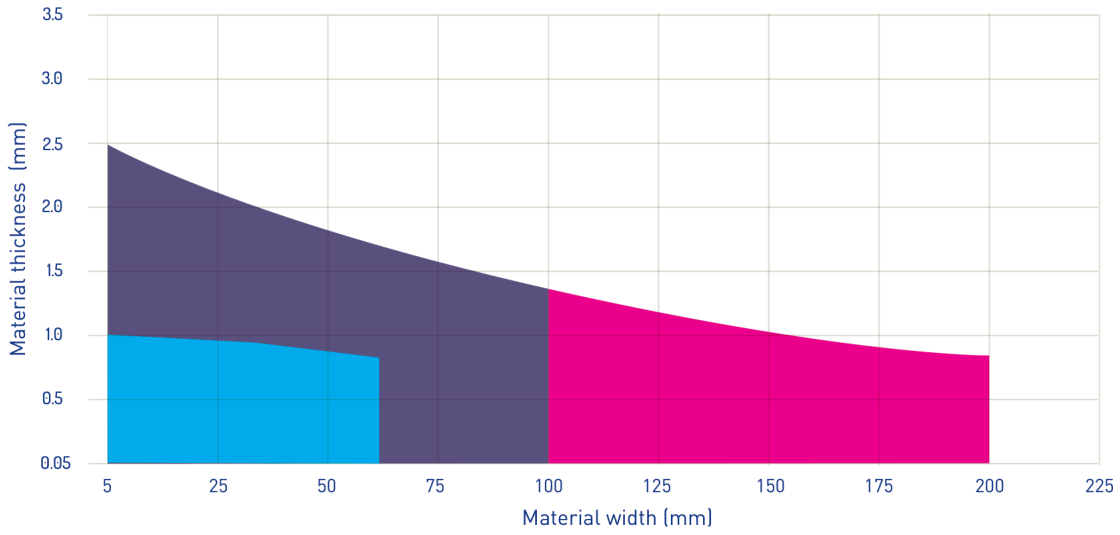


PRODUCTS

- J 341.xx1
- J 341.xx2
- J 380

Performance curve exemplary. Specific calculations on request.

TECHNICAL SPECIFICATIONS

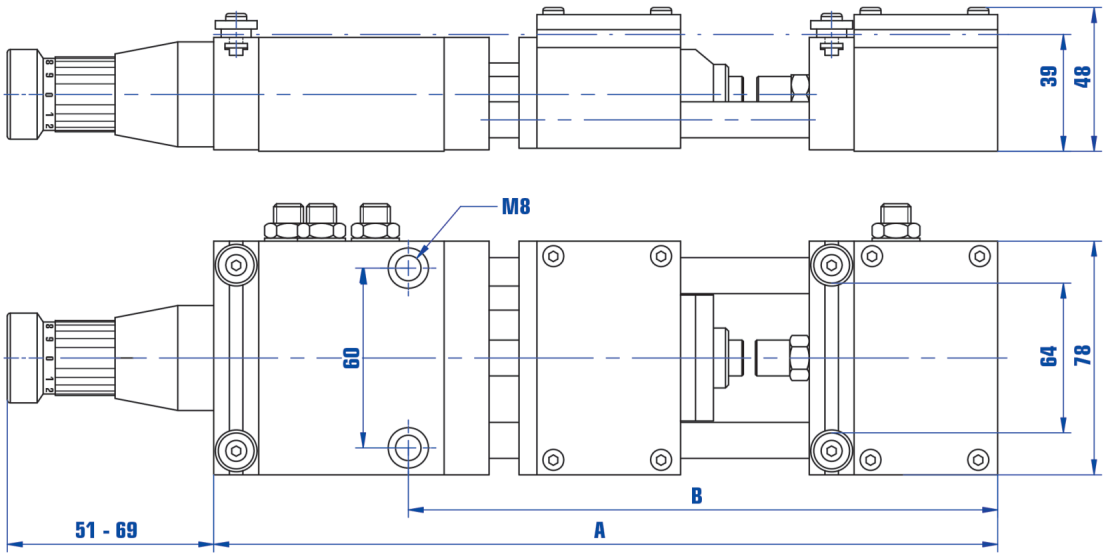

MODEL	J 380.030	J 380.060
Feed length (mm)	0-33	0-66
Distance A (mm)	262	328
Distance B (mm)	197	230
Max. stroke rate unloaded	300/min.	250/min.
Air consumption per cycle	0.3 l	0.55 l
Band width max. (mm)	64	
Band thickness max. (mm)	1.0	
Clamping force (at 6 bar)	580 N	
Traction force (at 6 bar) 275 N	275 N	

SWITZERLAND
Zehnder & Sommer International
info@zehndersommer.com
Tel +41 31 740 50 50

GERMANY
Zehnder & Sommer Europe
info@zehndersommer.de
Tel +49 2302 276140

zehndersommer.com
ZSswiss.com

©Zehnder & Sommer | Information provided without guarantee. Subject to modifications.