ZEHNDER&SOMMER Automation

Pneumatic cutters

P 120 – 320




Scope of delivery

- Column guides with linear bushings
- Blade clearance adjustment for optimal cutting results
- continuous adjustable cutting force
- knife of special steel, regrindable
- complete with 24V DC electro magnetic valve

Options

- Spring-loaded blank holder
- Drive with pneumatic cylinder
- Plunger drive mechanism
- Mounting bracket


Performance diagramm

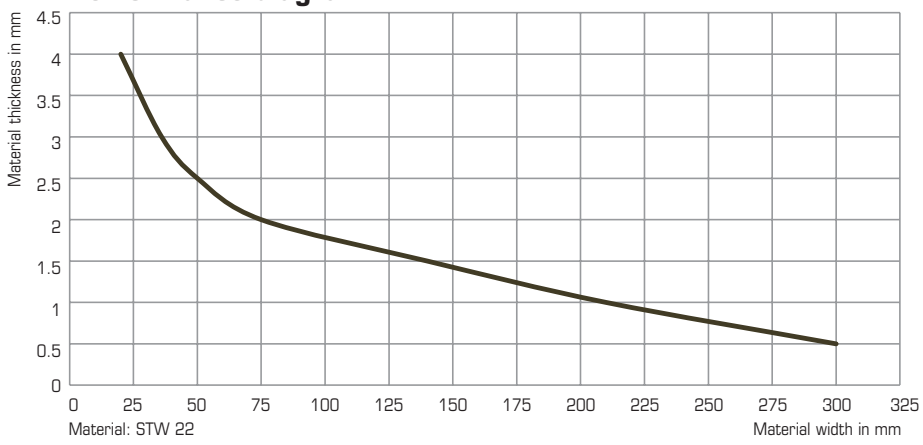


Technical modifications subject to change. Performance data depends on material.

ZEHNDER & SOMMER AG
www.zehnder-sommer.com
info@zehnder-sommer.com

Feeders, scrap shearers purpose machinery, hasps, straightening machines

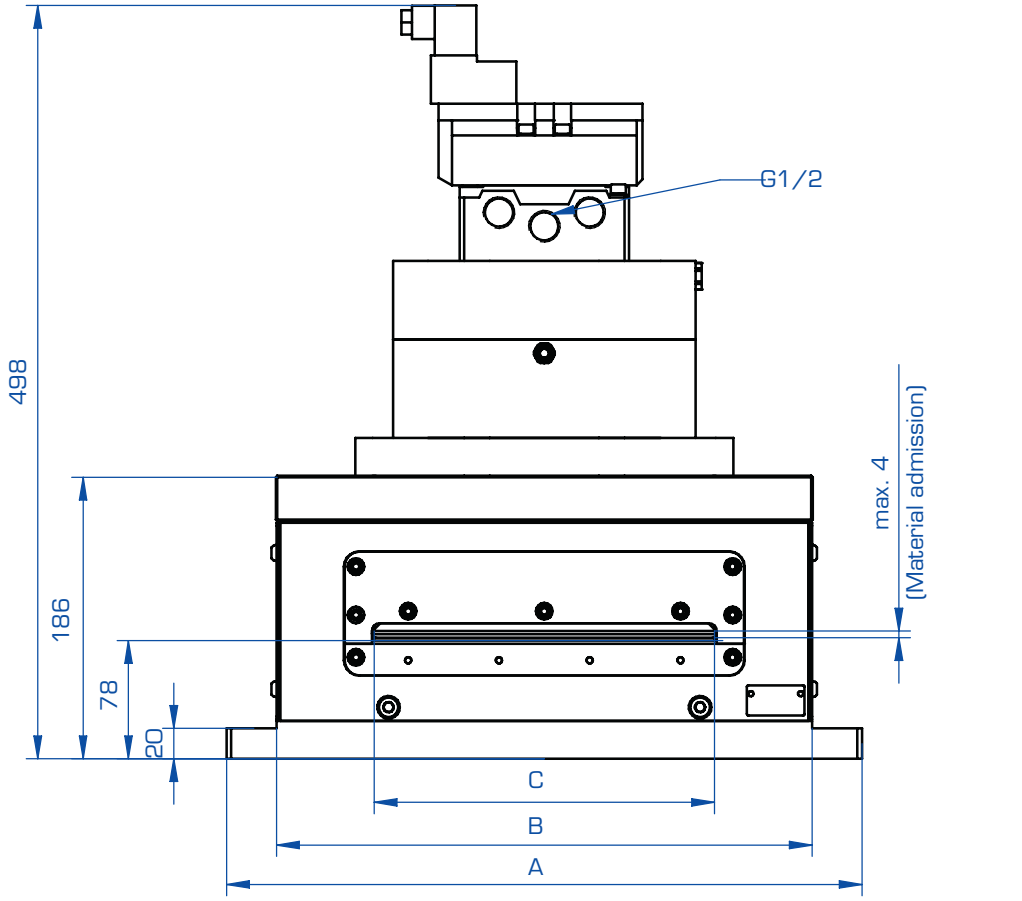

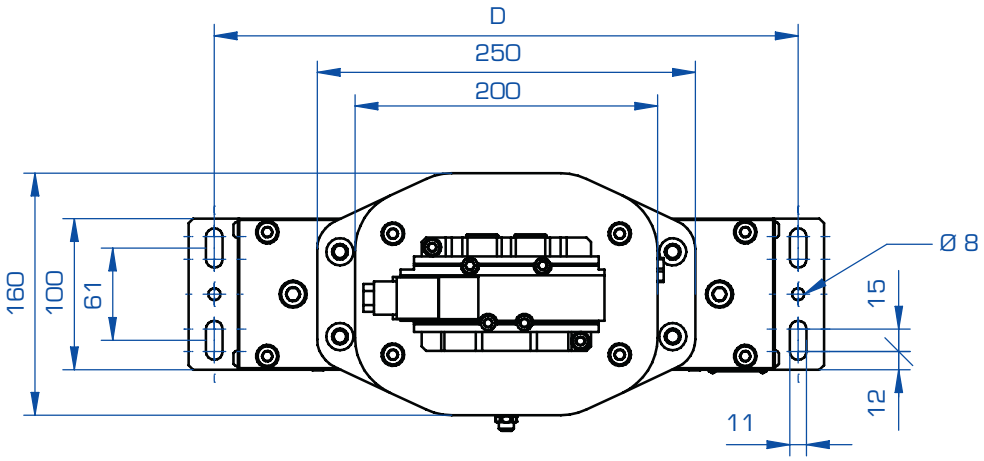

Model order number	Cutting force (approx.)	A	B	C	D	Max. frequency non-load	Air consumption per switch play
P 120	39 kN	320	254	120	286	200/min	4.5 l
P 220	39 kN	420	354	220	386	180/min	4.5 l
P 320	39 kN	520	454	320	486	160/min	4.5 l

Technical modifications subject to change. Performance data depends on material.

Oktober 2012 – P 120–320 e

Head offices
ZEHNDER & SOMMER AG Saanefeldstrasse 2 CH-3178 Bösingen
Telefon +41 31 740 50 50 Fax +41 31 740 50 51
info@zehnder-sommer.com www.zehnder-sommer.com

with subsidiary in Germany:
ZEHNDER & SOMMER GmbH Bommerfelder Ring 96 DE-58452 Witten
Telefon +49 2302 276 140 Fax +49 2302 276 048
info@zehnder-sommer.com www.zehnder-sommer.com